


EC360 PLATINUM

Thermal Pad Series

The EC360® PLATINUM series presents the high-end variant of high-performance thermal pads. The pads have best thermal conductivity of 16.6 W/mK, more than high-end thermal pastes and are suitable for a variety of applications including CPUs and GPUs (that are cooled by thermal pads), memory chips and other electrical components. They perform particularly well for water cooling systems and are easy to use.

The pads are not adhesive, but stick a little, so they can be easily positioned. It is the perfect solution for heat-transfer in adverse surface conditions when the use of thermal paste is unsuitable. Handling is particularly safe, as the pads are electrically isolating and there is no risk of short-circuiting. Additionally, they can easily be cut using a scissor, which allows trimming to the perfect size for any surface.

Cross-section view

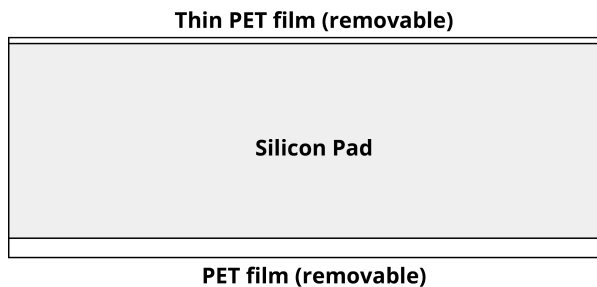

A full silicone pad covered with a PET film on both contact surfaces for increased stability and easy installation. Both are to be removed for installation.

Types and Configurations

Thickness*	Available sizes*
0.5 mm / 0.02 "	50x50 mm, 100x100 mm, 200x200 mm
1.0 mm / 0.04 "	50x50 mm, 100x100 mm, 200x200 mm
1.5 mm / 0.06 "	50x50 mm, 100x100 mm, 200x200 mm
2.0 mm / 0.08 "	50x50 mm, 100x100 mm, 200x200 mm
2.5 mm / 0.10 "	50x50 mm, 100x100 mm, 200x200 mm
3.0 mm / 0.12 "	50x50 mm, 100x100 mm, 200x200 mm

* Custom configurations are available upon request, for worldwide industrial inquiries please contact us at: sales@extremecool360.com

Technical Properties

Properties	Unit	Value	Test method
Color	-	grey	Visual
Thermal Conductivity	W/mK	16.6	ASTM D5470
Specific Gravity	g / cm ³	3.5	ASTM D 792
Hardness	Shore C	40	ASTM D 2240
Elongation	kg / cm ²	55	ASTM D 412
	Pa	5.8*10 ⁹	ASTM D 412
Volume Impedance	Ohm-cm	2.8*10 ¹¹	ASTM D 257
Breakdown Voltage	kV / mm	5.0	ASTM D 149
Usable Temperatures	°C	-40 - 220	EN 344
Flame Rating	-	VO	UL 94

Installation Recommendation

- Clean surfaces from dirt and other possible residue. If applicable, isopropyl 90% alcohol is recommended to ensure a clean surface.
- Remove one of the protective layers and place the exposed side of the thermal pad facing the surface of the chip. Once positioned gently press on it to make it stick.
- Remove the second protective layer and install the heatsink.

Disclaimer Properties of the products may be revised due to changes in the manufacturing process. The property values in this document are not guaranteed. This product is made of silicone, this means silicone oil may exude from the product and low molecular siloxane may vaporize depending on operating conditions. This product is designed and manufactured for general industrial use only. Never use this product for medical, surgical purposes and/or other purposes. Never use this product for the purpose of implantation and/or other purposes by which a part of the product remains in the human body. Before using safety must be evaluated and verified by the purchaser. Contents described in the document do not guarantee performances and qualities required for the purchaser's specific purposes. Statements concerning possible or suggested uses made herein may not be relied upon.

© 2022, Jaden Technologies GmbH, Augustastr. 14, 47198 Duisburg, Germany